



Tailor made for retail and public environments

With the MultiQ 212, MultiQ have taken custom made monitor solutions for retail and public environments one step further. The product offers a solid, stable and very flexible display screen combined in a compact and elegant design. Metal housing and protective glass gives MultiQ 212 a unique durability.

Durability

MultiQ have many years of experience within retail and public environment monitor installations. Based on this our monitors answer to the challenges of public environments. MultiQ 212 is designed for 24/7 operation and is with its metal housing and protective glass shield in particular suitable for retail environments.

Environmental and Ergonomic

With the power saving and lead free LED backlight the MultiQ 212 LED saves energy costs and the environment. The MultiQ 212 also offers several features to improve the ergonomics and installation, such as that it may be ordered with antireflective glass and a range of touch alternatives. The extended tilting angle further improves the ergonomic options and makes it possible to work standing up.

Custom design

MultiQ 212 is a flexible platform with unique possibilities for customisation: optional chassis colour, logo in print or relief, card reader, integrated speakers etc.



MultiQ 212 LED

Technical specifications

P-Line

| Display | |
|---------------------|--|
| Panel type | 12,1", LCD TFT |
| Backlight type | LED |
| Active display area | 246,0 (H) x 184,1 (V) mm |
| Resolution | 800 x 600 max. |
| Brightness | 450 cd/m ² (Typ.) |
| Contrast ratio | 700:1 (Typ.) |
| Viewing angle | 160° (H) x 140° (V) (CR 10:1, Typ.) |
| Number of colours | 16.2 Mill, 6 bits + FRC |
| Response time | 35 ms Tr+Tf (Typ.) |
| Pixel dimension | 0,297 (H) x 0,297 (V) mm |
| OSD Control | Auto Set, Brightness, Contrast, Colour, Position, Image, Miscellaneous. |
| Hot keys functions | Control key locking, Quick brightness and contrast adjustment, Auto Set. |
| Lamp life | 50.000 h (min) |
| MTBF | 50.000 h |
| Input Signal | |
| Video signal | Analog 0,7 Vp-p. 75 ohm |
| Sync. signal | TTL Level, Positive/Negative, Separate sync (VGA) |
| Connector | VGA (15-pols D-sub), DC-in |
| Power | |
| AC/DC adapter | Input: AC 100~240 V, 50~60Hz Output: +12 V DC, 3 A |
| Power consumption | 11W (Typ.) |
| Power management | VESA DPMS Compatible |
| Dimension | |
| With stand | 281 (H) x 298 (W) x 129 (D) mm |
| With VESA | 250 (H) x 298 (W) x 48 (D) mm |
| Tilt with stand | +70°,-0° |

| Weight (Net) | |
|--|---|
| With stand | 4,3 kg |
| With VESA | 3,3 kg |
| Environment | |
| Operating temperature | 0 - 40°C |
| Transport & Storage | Ambient Temp: -10 - +60°C Humidity Range: 10 - 100% |
| General | |
| Plug & Play | DDC2B |
| Included accessories | AC/DC adapter - 1,5 m (black), Power cord - 1,8 m (black), VGA cable - 1,8 m (black). OPTIONS Touch: Serial or USB cable - 1,8 m (black). |
| Regulations | CE, UL |
| Warranty | 3 years SendIT |
| Security | Table locking (stand), Kensington locking capability. |
| Options | |
| Different models | |
| Touch | Resistive, Cap. |
| Glass | Anti reflex glass |
| Mounting | VESA (75 x 75 mm), Stand |
| Additional accessories | |
| Swivel plate, POS-Pole, Wall bracket kit | |
| Project options | |
| Speakers | 2 x 1,5 W, Serial or USB input |
| MSR | MagTek 3 tracks, USB, USB-KeyB, Serial |
| Other | Power USB-hub, Switches in the front, Protective film for resistive touch |

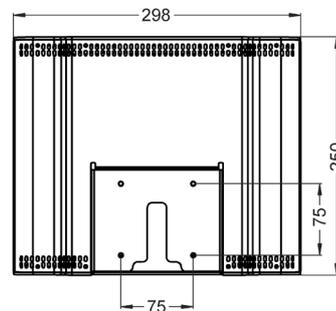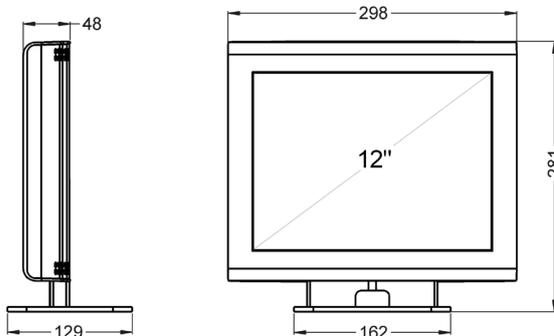

RoHS Compliant 2002/95/EG

©2011 MultiQ are registered trademarks or trademark applications of MultiQ International AB in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to change the specifications without prior notice.